



## Removes H<sub>2</sub>S from the Production Stream


- No downstream corrosion or scaling/fouling
- Downtime limited to periodic change out
- No liquids handling/disposal required
- No additional equipment required
- Treats only H<sub>2</sub>S concentration present, avoiding over treating & added costs
- Full service & support from EcoVapor service technicians
- Cost reduction from conventional methods



## **Features**

- Removes H<sub>2</sub>S from the gas stream using adsorbent media
- Media bed life is application specific, typically 6 - 12 months
- Customer connections include inlet, outlet, and liquids dump interfaces
  - Sizes include 6" to 10" RFF at 150# or 300#
- Sampling ports included for assessing media bed health
- Multiple vessel sizes available to accommodate flow and pressure needs
  - 36"- 96" diameter
  - 60"-360" shell length

Speak to an EcoVapor representative today to discuss your application!

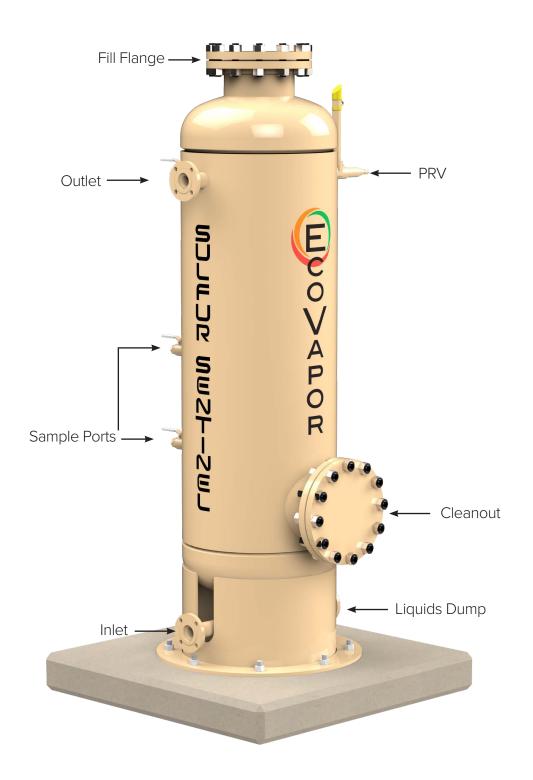



## **Corporate Office**

1442 Delgany St. Suite 100 Denver, CO 80202

## **Field Offices**

1804 Cherry Ave.

Greeley, CO 80631

915 Goode St.

Midland, TX 79701

5072 Owan Industrial Park Dr. Williston, ND 58801

info@EcoVaporRS.com

1-844-No-Flare (844.663.5273)